

SABdrain

water drainage systems

706 Grande 500mm x 500mm Load Class G900

FOR ASPHALT

Specification Clause

The surface drainage system Sabdrain 706 500500 polypropylene plastic channel fitted with Cast Iron Grating, Load Class Rating – G900

* Load Classification AS3996:2006 G900 is similar to EN1433:2008 F900

Properties

Sabdrain 706 500500 polypropylene plastic channels shall meet the following properties:-

| | |
|-------------------------------|---------------------------------|
| COMPRESSIVE STRENGTH | 58N/mm² |
| TENSILE STRENGTH | 14N/mm² |
| DENSITY | 0.960 g/cm³ |
| WATER ABSORPTION | <0.05% |
| THERMAL EXPANSION COEFFICIENT | 15x10⁻⁵ mm/°C |
| FROST PROOF | YES |
| MELTING POINT | 162 – 168 °C |
| COEFFICIENT OF FRICTION | N=0.010 |
| CHEMICAL RESISTANCE | YES |
| NON FLAMMABLE | YES |

for detailed chemical resistance, refer to <https://sabdrain.com.au/chemical-resistance/>

Dimensions

Sabdrain 706 500500 channels dimensions shall be an internal height of 500mm with an internal width of 500mm and an overall height of 560mm and width of 595mm, with Male/Female interlocking joints, the channels shall have provision to create a 2° (17M) Radius.

Grates


Refer to the relevant specification sheet for the selected grate.

Installation

The Sabdrain 706 500500 Drainage system shall be installed for its intended purpose. Any improper installation and usage could result in product failure.



Expansion Joint to Engineers
Specification. (See Note 3)

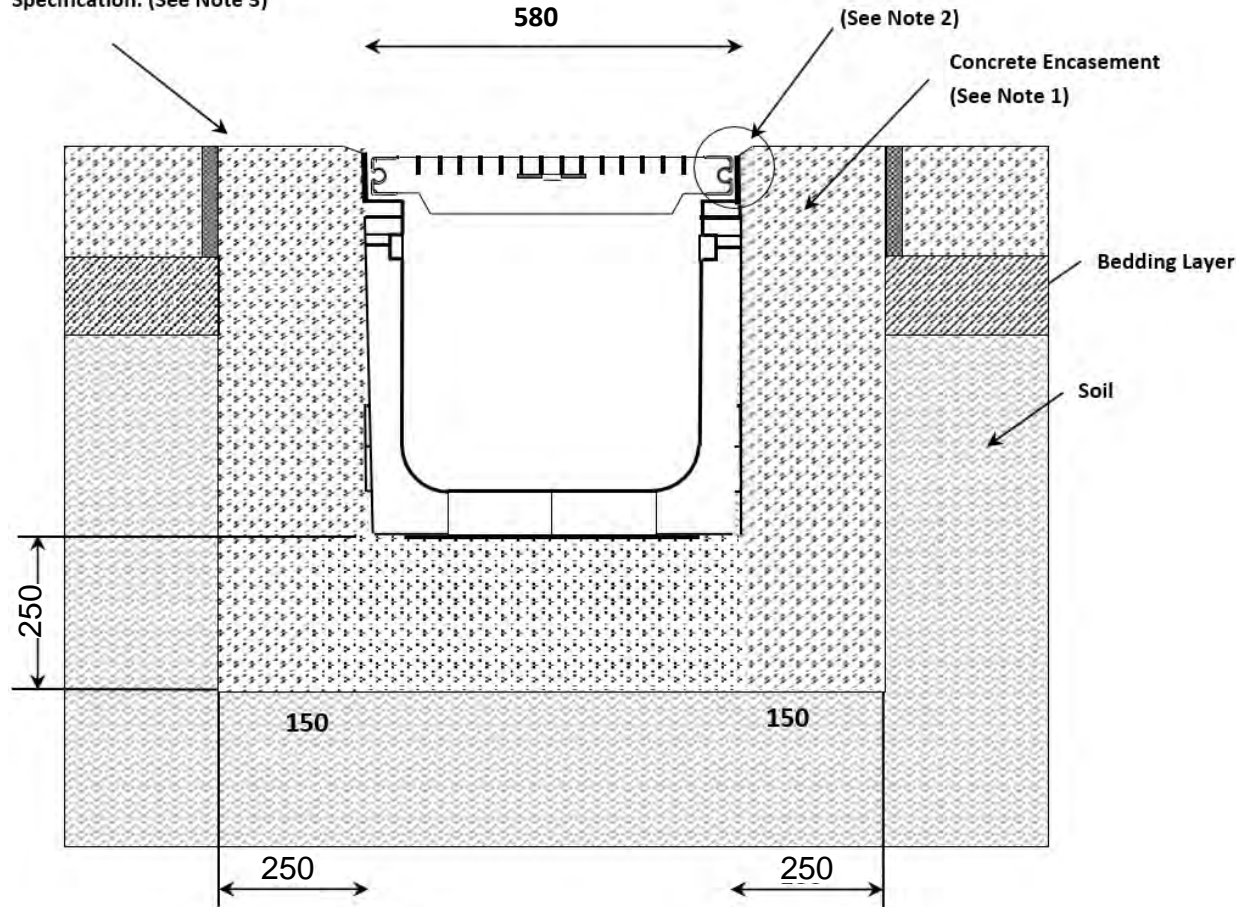

Notes

1. Concrete encasement dimensions and/or reinforcement changes may be required for specific site conditions. Minimum concrete strength of 25MPa is recommended. Ensure concrete is vibrated Always seek engineering advice.
2. The finished level of the concrete encasement should be 3-5mm above the channel edge.
3. Expansion control joints are recommended for protection of the concrete encasement.