



Pool Grates

Installation

Jonite pool grates are installed very similar to how light-duty trench grates are installed, only directly on level concrete, or on trimmers for added aesthetics and flatness. It is important to note that, however, although they are very similar, the condition of the site must be kept pristine to prevent any potential injuries for bare feet.

1 LIGHT-DUTY POOL GRATES ON LEVEL CONCRETE


Jonite pool grates, which are strictly for pedestrian application (6KN), can be installed directly on level concrete as long as they are installed flatly with no visible rocking.

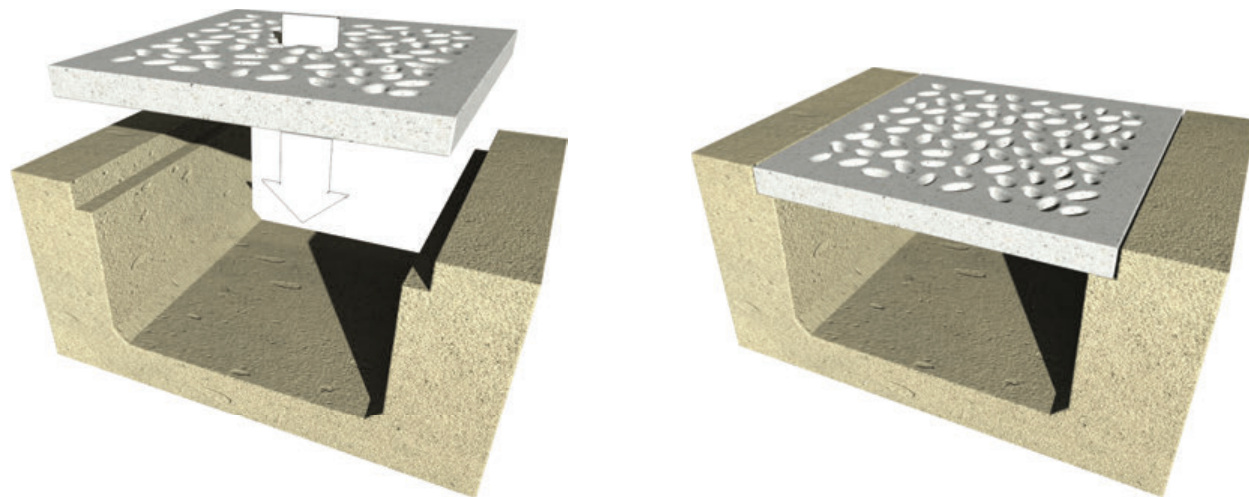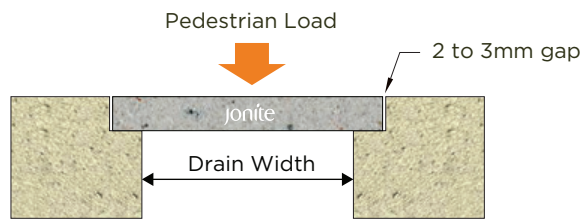


Install directly on flat and level concrete drains and tiles.

2 POOL GRATES WITH JONITE L-TRIMMERS™

Pool grates can be installed with Jonite L-Trimmers™ to provide a boost in aesthetics as well as to help level the support for the grates, which is highly essential in a pool environment.

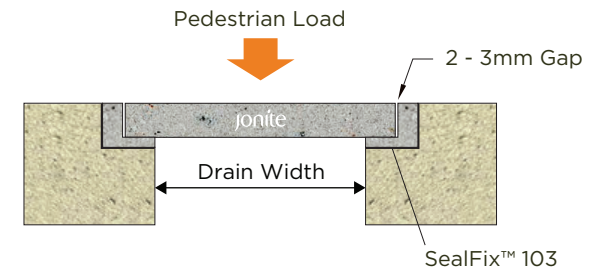


Jonite L-Trimmers™ is installed using dry fixing with SealFix™ 103 (epoxy mortar).

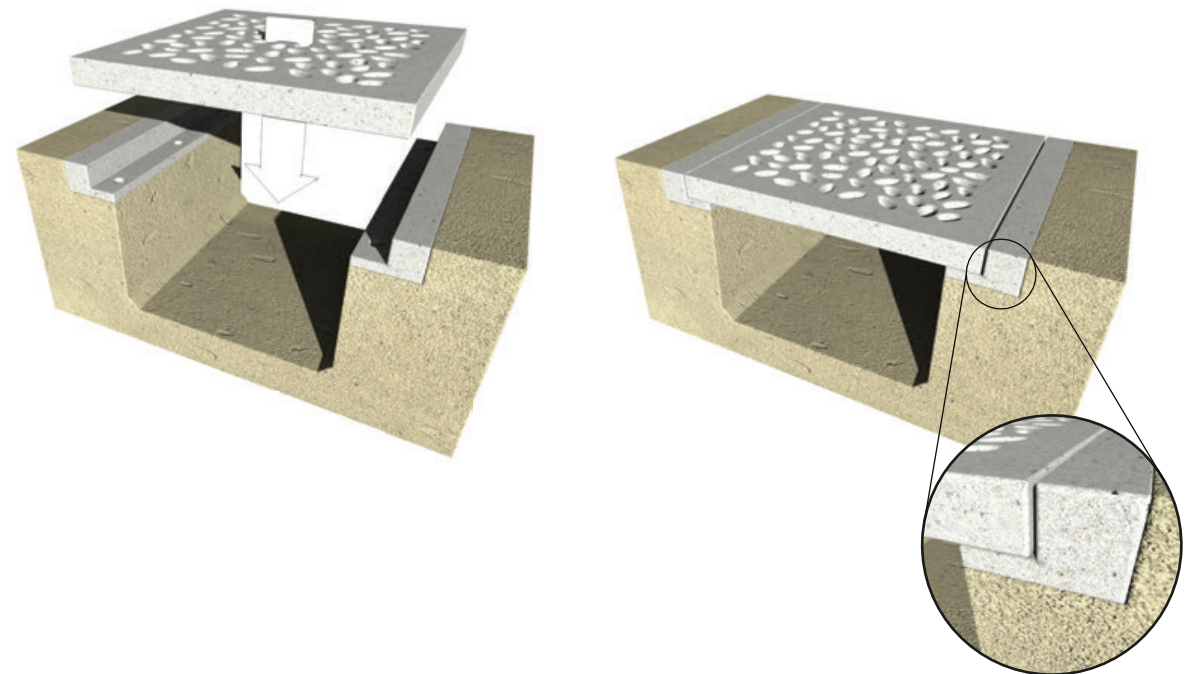


Jonite L-Trimmers™ provides a clean and aesthetically appealing installation.

3
POOL GRATES WITH JONITE STUD TRIMMERS™

Pools that require more water drainage to prevent splash can use Stud Trimmers™ with the pool grates to help improve the flow rates of the perimeter drains.

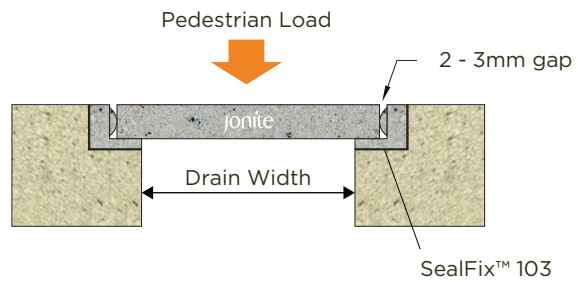

Jonite Stud Trimmers™ is installed using dry fixing with SealFix™ 103 (epoxy mortar).

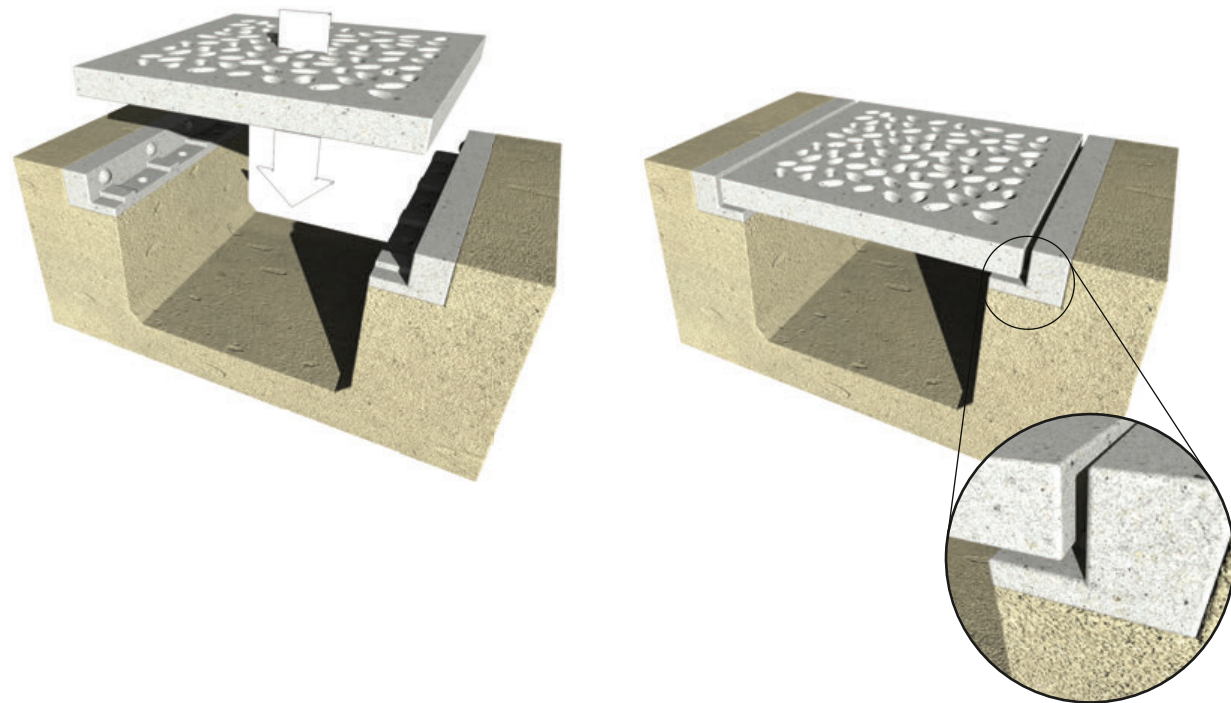

Studs on the trimmers provide increased perforation for improved flow rates.

Sump Covers

Installation


Sump covers all over the world are installed very differently. The methods in which Jonite sump covers are installed are highly dependent on the application and the size of the sump.

Sump covers for a vehicular use would require a higher level of support like L-steel angles or Jonite Trimmer Frame™.

For a large custom sump, the multiple panels can also be supported by a frame using L-steel angles or a custom Jonite Trimmer Frame™.

1
SMALL SUMP COVERS ON LEVEL CONCRETE

Only light-duty Jonite sump covers, which are strictly for pedestrian application (6KN-15KN), can be installed directly on level concrete as long as they are installed flatly with no visible rocking across all four sides of the support.

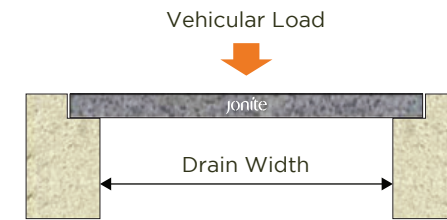

Install directly on level concrete sump.

